

## Marine Certified Flexible Air Ducts



marine series

**AFS**<sup>®</sup>

[afs.com.tr](http://afs.com.tr)


# afs ile denizleri aşın




European Marine Equipment  
Directive'e uygun



The dimensions, tolerances, and mechanical resistance of all flexible ducts are tested, classified and certified according to EN 13180. All technical details are for information only. All information and technical data in this leaflet is subject to change without prior notice. Based on these, permissible length tolerance is (-)3% for stated length (measured after fully stretched according to EN 13180)



## certified quality



1121/2020

164.112/1121/EWC MED0494

Certified by Warringtonfire according to requirements of the new Marine Equipment Directive (2014/90/EU). The certificate has validity in both Europe (MED) and USA (USCG)



## Marine Certificate

The International Maritime Safety Conventions require the Wheelmark to ensure that the equipment carried on board ships complies with certain safety requirements.

The Wheelmark which is affixed to products in compliance with the Marine Equipment Directive consists of a ship's Wheel together with the identification number of the Notified Body and certificate number.

The Marine Equipment Directive 96/98 EN has come into force on January 1st 1999 and covers a range of equipment carried on board ships registered under the flags of the European Union member states. It was established to ensure that, equipment which must comply with the requirements of international conventions (e.g. SOLAS) agreed by the International Maritime Organization also meets common standards of safety and performance across the EU. Approval requirements are also harmonized, which ensures certificates issued in one Member State are accepted by all states across the EU. The Directive applies to all "Community Registered Ships" and is mandatory since January 1, 2001.

Besides being based on the Mutual Recognition Agreement (MRA) between the US and the EU, the certificates of products are both MED&UGC approved, thus the products can also be used for the flag ships of US.

AFS is your partner when it comes to flexible ducting solutions in Marine Applications. All around the World, AFS HVAC product perform excellent level of quality.

Comfortable, environment friendly, user-friendly, safe, healthy indoor air quality can be supported by AFS Marine series on board. The air you breathe helps you live life to the fullest today and tomorrow.

Our Marine certification is secured by 25 years of experience and our outstanding quality in comfort and safety ventilation systems.

## ALUAFS.F MARINE

Duct Construction	: 3 ply aluminium 1 ply polyester
Nominal Thickness of Inner Duct	: 74 micron
Diameter Range (Ø)	: 82 - 800 mm
Wire Spacing	: 35 mm (Ø ≥ 127 mm)
Operating Temperature Range	: -30 °C / +250 °C
Air Velocity	: 30 m/s (max)
Operating Pressure	: +3000 Pa (max)
Standard Length	: 10 m
Packing	: Individual cardboard box single cardboard box
Reaction to Fire	: Limited combustibility
Certificates	: M0 (France) [CSTB]



\*Information on the emission level of volatile substances into indoor air, presenting a risk of toxicity by inhalation, on a scale ranging from A+ (very low emissions) to C (high emissions)

164.112/1121/EWC MED0492

## PACKING



certified quality



## ISOAFS-ALU.F ECOSOFT MARINE

Inner Duct Construction	: 3 ply aluminium 1 ply polyester
Nominal Thickness of Inner Duct	: 74 micron
Jacket Construction	: 1 ply aluminium 2 ply polyester
Nominal Thickness of Jacket	: 45 micron
Insulation - Thickness - Density	: Glass wool - 25mm - 16 kg/m <sup>3</sup>
Diameter Range (∅)	: 82 - 800 mm
Wire Spacing	: 35 mm (∅ ≥ 127 mm)
Operating Temperature Range	: -30 °C / +250 °C
Air Velocity	: 30 m/s (max)
Operating Pressure	: +3000 Pa (max)
Standard Length	: 10 m
Packing	: 10 m per single cardboard box
Reaction to Fire	: Difficult to ignite
Certificates	: M0 + M1 (France) [CSTB]



\*Information on the emission level of volatile substances into indoor air, presenting a risk of toxicity by inhalation, on a scale ranging from A+ (very low emissions) to C (high emissions)

**ECOSOFT**  
Nature & Different

164.112/1121/EWC MED0495

\*50 mm insulation available



## SONOAFS-ALU.FB ECOSOFT MARINE

Inner Duct Construction	: 3 ply aluminium 1 ply polyester	] Perforated
Nominal Thickness of Inner Duct	: 74 micron	
Barrier Construction	: 1 ply polyethylene	
Barrier Thickness	: 12 Micron	
Outer Jacket Construction	: 1 ply aluminium 2 ply polyester	
Nominal Thickness of Jacket	: 45 micron	
Insulation - Thickness - Density	: Glass wool - 25mm - 16 kg/m <sup>3</sup>	
Diameter Range (∅)	: 82 - 800 mm	
Wire Spacing	: 35 mm (∅ ≥ 127 mm)	
Operating Temperature Range	: -30 °C / +150 °C	
Air Velocity	: 30 m/s (max)	
Operating Pressure	: +3000 Pa (max)	
Standard Length	: 10 m	
Packing	: Single cardboard box	
Certificates	: M0 + M1 (France) [CSTB]	




\*Information on the emission level of volatile substances into indoor air, presenting a risk of toxicity by inhalation, on a scale ranging from A+ (very low emissions) to C (high emissions)

**ECOSOFT**  
Nature & Different

164.112/1121/EWC MED0494

\*50 mm insulation available



## SLEEVEAFS.B ECOSOFT MARINE

### Diameter Range (Ø)

82 - 508 mm

### Standard Length

10 m

### Barrier Type

Polyethylene

### Barrier Thickness

12 micron

### Jacket Construction

1 ply aluminium

2 ply polyester

### Jacket Thickness

45 micron

### Operating Temperature Range

-30 °C / +90 °C

### Insulation Material

ECOSOFT Glass wool

### Thickness

25 mm

### Density

16 kg/m<sup>3</sup>



## SLEEVEAFS.B ECOSOFT MARINE (50 mm insulated)

### Diameter Range (Ø)

82 - 508 mm

### Standard Length

10 m

### Barrier Type

Polyethylene

### Barrier Thickness

12 micron

### Jacket Construction

1 ply aluminium

2 ply polyester

### Jacket Thickness

45 micron

### Operating Temperature Range

-30 °C / +90 °C

### Insulation Material


ECOSOFT Glass wool

### Thickness

50 mm

### Density

16 kg/m<sup>3</sup>

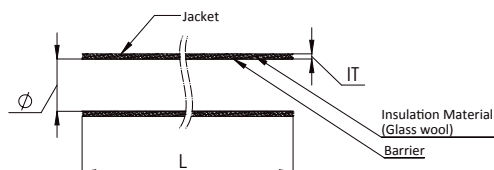

\*Information on the emission level of volatile substances into indoor air, presenting a risk of toxicity by inhalation, on a scale ranging from A+ (very low emissions) to C (high emissions)

**ECOSOFT**  
Nature Different

164.112/1121/EWC MED0493



certified quality

## SEMIAFS




Class A1

Duct Construction	: Corrugated aluminium continuous interlock system
Nominal Thickness of Duct	: 90 micron
Diameter Range (∅)	: 80-800 mm
Operating Temperature Range	: -25 °C / + 250 °C
Air Velocity	: 25 m/s (max)
Operating Pressure	: +5000 pa (max)
Standard Length	: 1,5 m / 3,0 m / 6,0 m
Compression Ratio	: 1/3
Packing	: Single nylon package / Bulk packing
Reaction to Fire	: Non-combustibility
Certificates	: Class A1 (EN 13501-1) Flame Spread Index:0 [UL 723 as per UL 181] Smoke Developed Index:0 [UL 723 as per UL 181] Letter / MED Approval without testing



## SEMIAFS.C



Class A1

Duct Construction	: Corrugated aluminium continuous interlock system
Nominal Thickness of Duct	: 90 micron
Diameter Range (∅)	: 80-500 mm
Operating Temperature Range	: -25 °C / + 250 °C
Air Velocity	: 25 m/s (max)
Operating Pressure	: +5000 pa (max)
Standard Length	: 1,5 m / 3,0 m / 6,0 m
Compression Ratio	: 1/3
Packing	: Single nylon package / Bulk packing
Reaction to Fire	: Non-combustibility
Certificates	: Class A1 (EN 13501-1) Letter / MED Approval without testing



## SEMIAFS-INOX



316 L

Duct Construction	: Corrugated 316 L stainless steel continuous interlock system
Nominal Thickness of Duct	: 100 micron
Diameter Range (∅)	: 80-800 mm
Operating Temperature Range	: - 30 °C / + 500 °C
Air Velocity	: 25 m/s (max)
Operating Pressure	: +12000 pa (max)
Standard Length	: 1,0 m / 1,5 m / 2,0 m / 2,5 m / 3,0 m / 5,0 m
Compression Ratio	: Can not be compressed
Packing	: Single nylon package
Reaction to Fire	: Non-combustible
Certificates	: Class A1 (EN 13501-1) Letter / MED Approval without testing




look up ^  
notice  
the fresh air





\*Information on the emission level of volatile substances into indoor air, presenting a risk of toxicity by inhalation, on a scale ranging from A+ (very low emissions) to C (high emissions)

**ecosoft**  
Naturally Different



## Marine Flexible Air Ducts



**AFS**<sup>®</sup>

FLEXIBLE KANAL AŞ

İvedik OSB 1468. Cad. No: 153  
06370 Yenimahalle ANKARA/TÜRKİYE  
T: +90 312 395 48 60  
F: +90 312 395 48 68

[afs.com.tr](http://afs.com.tr)

   [afsflex](https://www.instagram.com/afsflex)

