



beytel

BEYAZIT TEL SANAYİ
BEYAZIT WIRE COMPANY

Beytel – Beyazıt Wire Company was established in 2001 in Antakya, located in Hatay province of Turkey.

We aim to continue the legacy of our family-owned businesses, ranging from hotels to automotive which has for decades been dedicated to high-quality production, based on trust and customer satisfaction.

Our will to grow has always been our strength.

Our initial production capacity have been increased to 5000 tons per month in a very short period of time, making us one of the leading manufacturers in our region.



beytel

BEYAZIT TEL SANAYİ
BEYAZIT WIRE COMPANY

Our third and newest hot-dip galvanizing line is started production at the end of 2020 and highlights our commitment to fulfilling the continuously growing demand in the wire markets and contributing to the growth of our sector





20 + YEARS OF EXPERIENCE

60.000 TONS PRODUCTION PER YEAR

beytel

BEYAZIT TEL SANAYİ
BEYAZIT WIRE COMPANY

OUR PRODUCTS

HOT DIP GALVANIZED WIRE

PVC COATED WIRE

BARBED WIRE

BOX STAPLING & STITCHING WIRE



beytel

BEYAZIT TEL SANAYİ
BEYAZIT WIRE COMPANY

HOT DIP GALVANIZED WIRE

Technical Specifications

Material	Low Carbon Steel Wire
Coating	Hot-Dip Galvanized (Zn)
Wire Diameter	1.40 – 7.50 mm
Volume of Coating	30 - 360 g/m ²
Raw Material Grade	SAE 1006, SAE 1008, SAE 1018
Tensile Strength	400 - 1000 N/mm ²
Packaging	Rosette coils with high quality steel strapping
Coil Weight	~ 300 - 1000 kg





BARBED WIRE

Technical Specifications	
Material	Low Carbon Steel Wire
Coating	Hot-Dip Galvanized (Zn)
Volume of Coating	40 - 360 g/m²
Line Wire Diameter	1.90 mm / 2.00 mm / 2.20 mm / 2.50 mm
Barbs	2 twisted line wires with 4 spikes
Barb Wire Diameter	1.90 / 2.00 mm
Distance of Barbs	80 mm to 120 mm
Coil Weight	18 - 20 kg
Quality Standard:	TSE EN 10223-1
Barb spacing can be adjusted on request.	



PVC COATED GALVANIZED WIRE

Technical Specifications

Material	Low Carbon Steel Wire
Coating	Hot-Dip Galvanized (Zn) & PVC Extrusion Coating
Tensile Strength	400 - 500 N/mm ²
Coating Thickness	~ 1 mm
Coil Weight	300 - 500 kg
Packaging	Rosette

RAL catalog colors available upon request





BOX STAPLING & STITCHING WIRE

Mainly used for agricultural wooden crates
Corrugated boxes
Staples for furniture

Technical Specifications

Material	Low Carbon Steel Wire
Coating	Hot-Dip Galvanized (Zn)
Wire Diameter	0.80 - 1.30 mm
Coil Weight	~ 5 - 7 kg
Cardboard Packed Coil Weight	~ 160 - 190 kg
Cardboard Dimensions	70 cm x 50 cm x 40 cm

VALUES & PRINCIPLES

As Beytel, we have always been customer-oriented, striving for reliable relationships, by responding quickly to market needs and expanding production without sacrificing quality. We constantly look to renew ourselves and keep pace with technology, without losing our boutique spirit.

VALUES & PRINCIPLES

Tradition – *Remaining true to our boutique spirit and craft*


Progress – *Striving to get better every day*

Trust – *Keeping our word*

Cooperation – *Becoming a business partner for life*

Sustainability – *Production with environmental awareness and social responsibility*



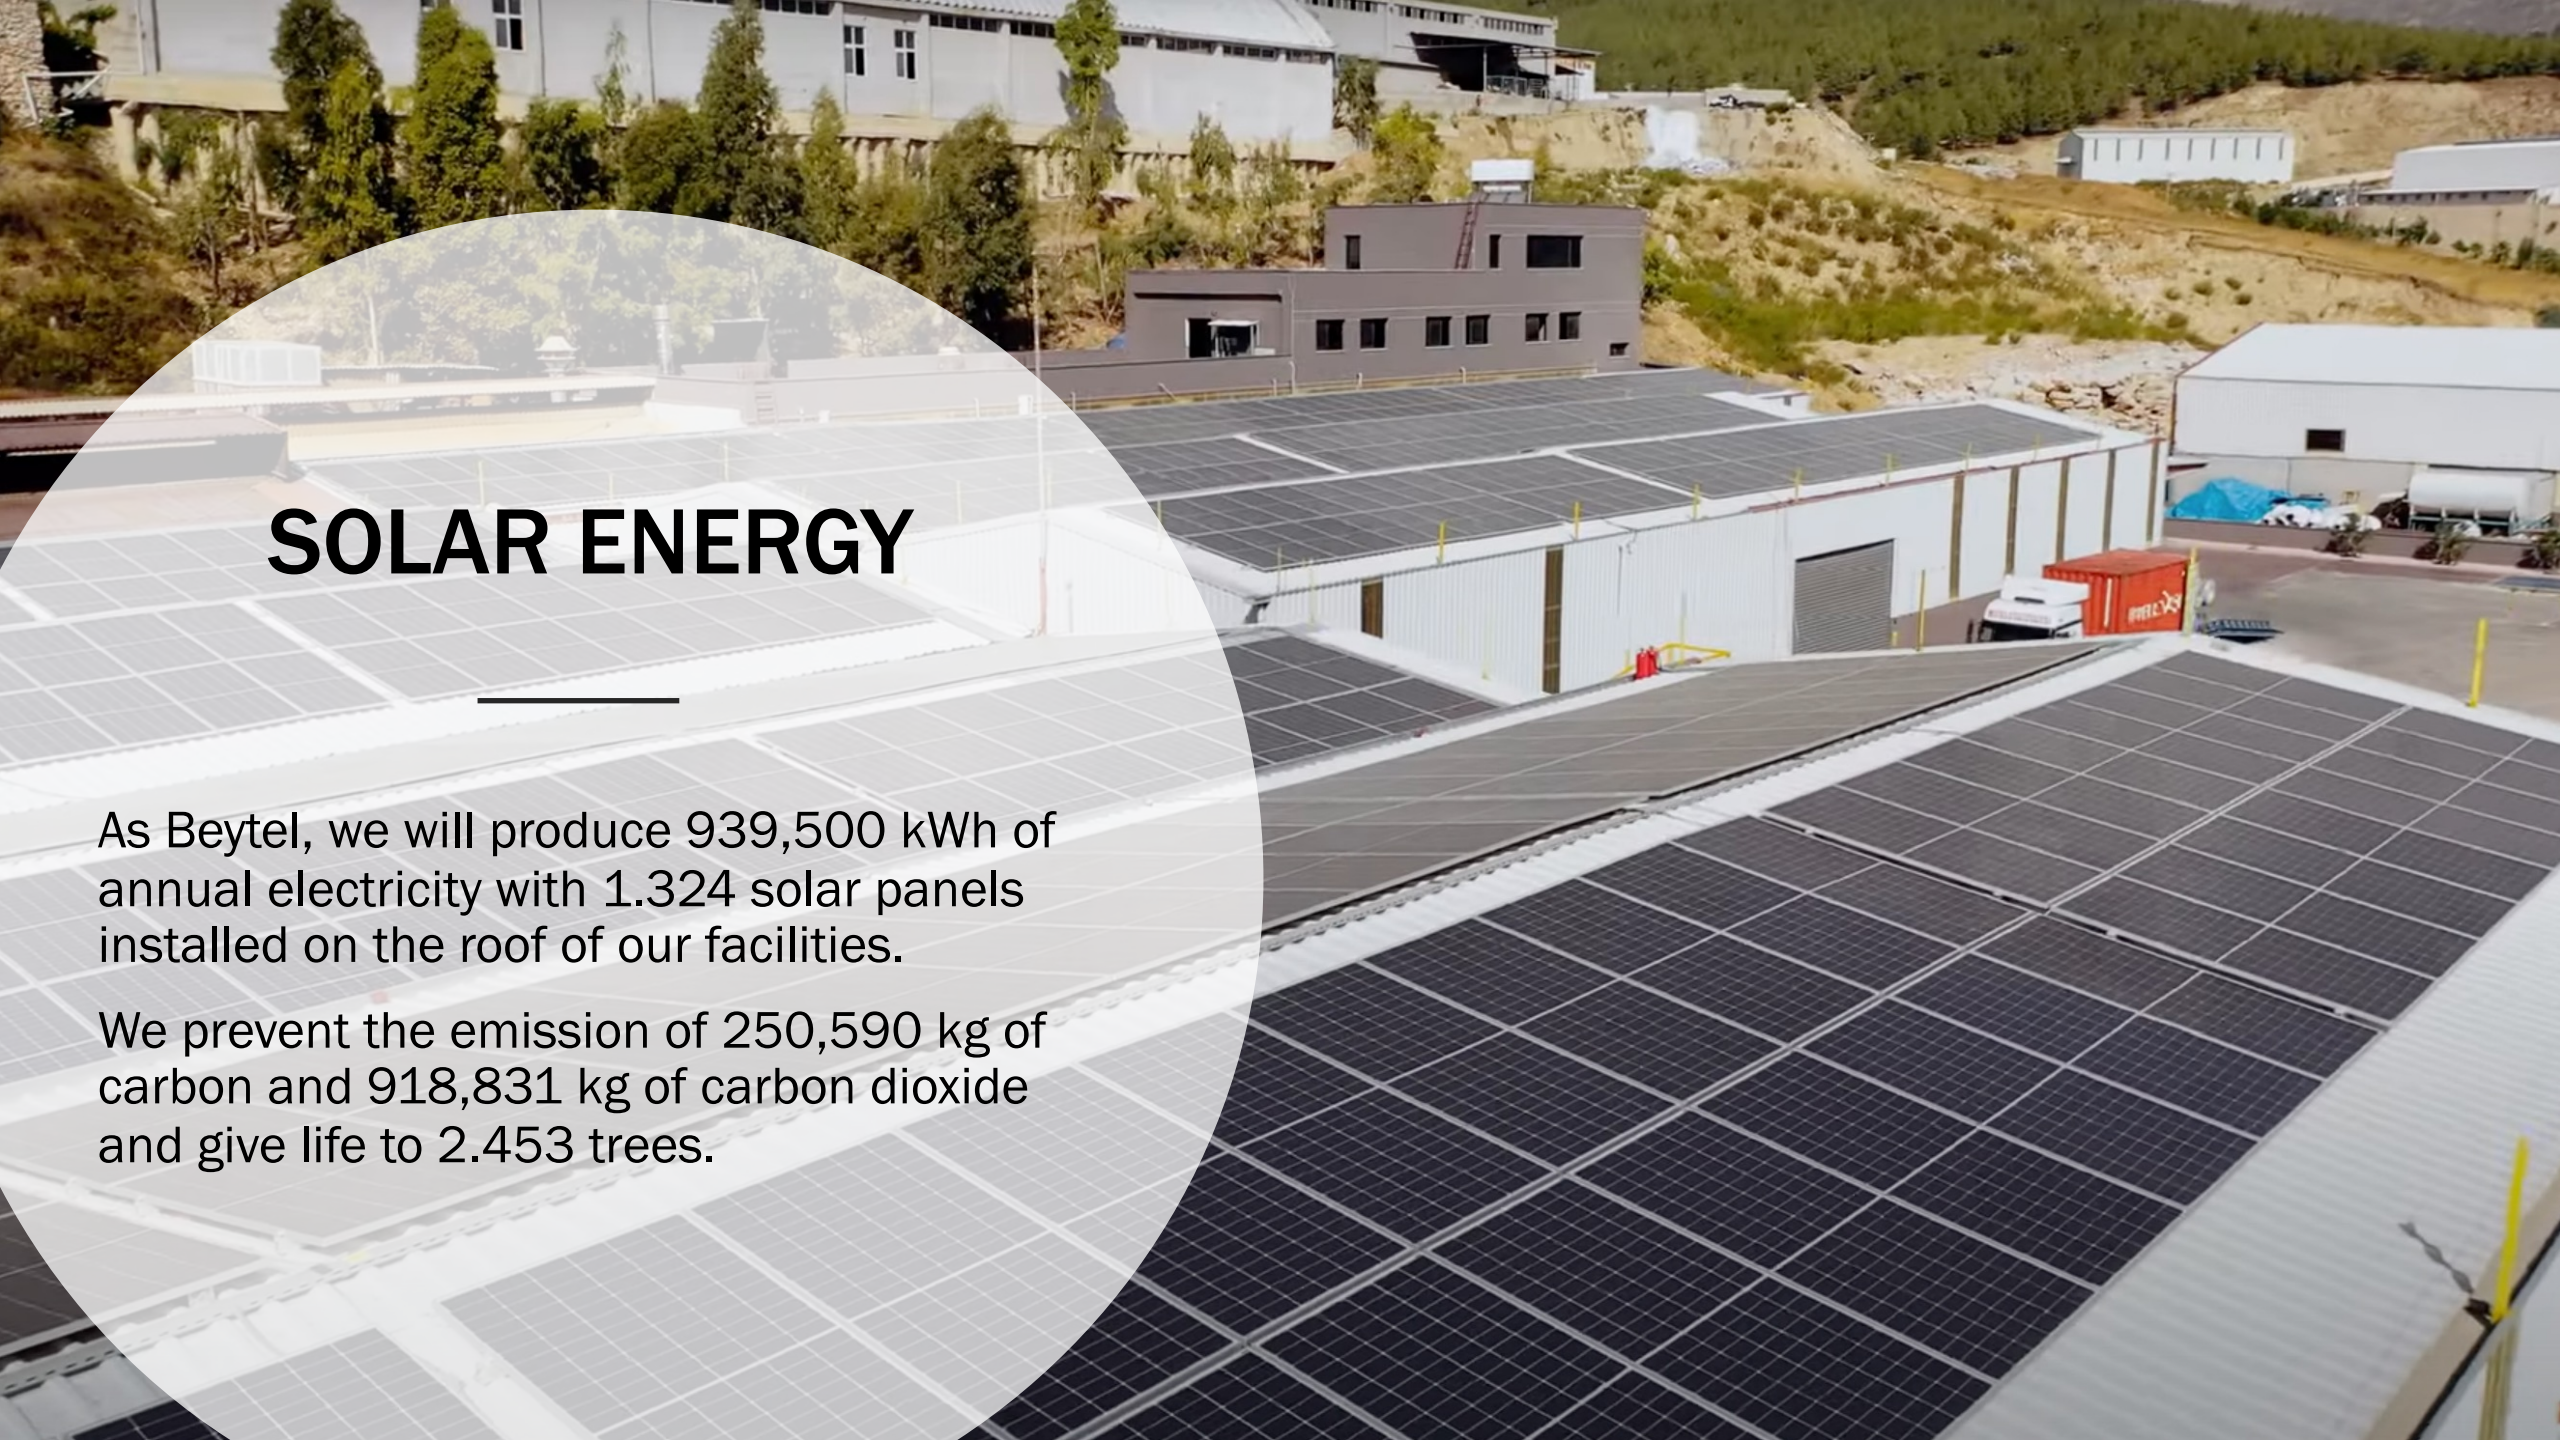

SOLAR ENERGY

As Beytel, we will produce 939,500 kWh of annual electricity with 1.324 solar panels installed on the roof of our facilities.

We prevent the emission of 250,590 kg of carbon and 918,831 kg of carbon dioxide and give life to 2.453 trees.



**Committed to
every wire we
draw**



beytel

BEYAZIT TEL SANAYİ
BEYAZIT WIRE COMPANY

www.beytel.com

Antakya Organize Sanayi Bölgesi 5 No'lu Yol 4. Cad. No. 4
Belen, Hatay 31350 Turkey