

BASE GLOBAL



Company Profile

We Exceed Your Expectations

www.basegt.com

Table of Content



ABOUT COMPANY



VISION / MISSION



OUR PRODUCT RANGE



CONTACT

www.basegt.com





BASE GLOBAL

About Company

At Base Global, we are committed to excellence and innovation, providing our clients with customized solutions that support sustainable growth and long-term success in a competitive global marketplace. With 15 years of STEEL industry experience and a professional background as a Metallurgical Engineer, our founder brings deep technical expertise and a strong understanding of industrial requirements to the forefront of our operations.

www.basegt.com

Mission

Our mission is to bridge the gap between manufacturers and global markets by offering high-quality, reliable, and cost-effective solutions.

Vision

We are committed to excellence and innovation, providing our clients with customized solutions that support sustainable growth and long-term success in a competitive global marketplace.



**Our
Value**

Galvanised Steel Wire



Technical Specifications

- ❖ Wire Diameter Range: 0,30mm - 12,00mm
- ❖ Zinc Coating Range: 40gr/m² - 500gr/m²
- ❖ Tensile Strength Range: 350N/mm² - 1970N/mm²
- ❖ Coil Weight Range: 25kg up to 1.500kg
- ❖ Carbon Content: Low-Medium-High Carbon 1006-1082C
- ❖ Applications: Fencing, Gabion, Cable Armoring, Recycling Industry, Agriculture industry, Hose production

Black Annealed Wire



Technical Specifications

- ❖ Wire Diameter Range: 1,20mm - 8,00mm
- ❖ Tensile Strength Range: 350N/mm² -480N/mm²
- ❖ Coil Weight Range: 25kg up to 1.000kg
- ❖ Carbon Content: Low Carbon 1006-1008-1010C
- ❖ Applications: Construction, Recycling industry, Agriculture industry

Fence Gate



Technical Specifications

- ❖ 2D panel inside
- ❖ Height Range: 83cm - 2430cm
- ❖ Width Range: 100cm - 6000cm
- ❖ Full set, all include, ready to install.
- ❖ Stainless steel / Aluminum handle and lock

Technical Specifications

- ❖ Wire Diameter Range: 3,80mm - 10,00mm
- ❖ Zinc Coating Range: 40gr/m² - 80gr/m²
- ❖ 2D - Security - Decorative models
- ❖ Height Range: 630mm - 3230mm
- ❖ All Ral code colors are available
- ❖ Width Range: 2000mm-3000mm




Technical Specifications

- ❖ Wire Diameter Range: 3,80mm - 10,00mm
- ❖ Zinc Coating Range: 40gr/m² - 80gr/m²
- ❖ 3D - Security - Decorative models
- ❖ Height Range: 630mm - 3230mm
- ❖ All Ral code colors are available
- ❖ Width Range: 2000mm-3000mm



Galvanised Profile

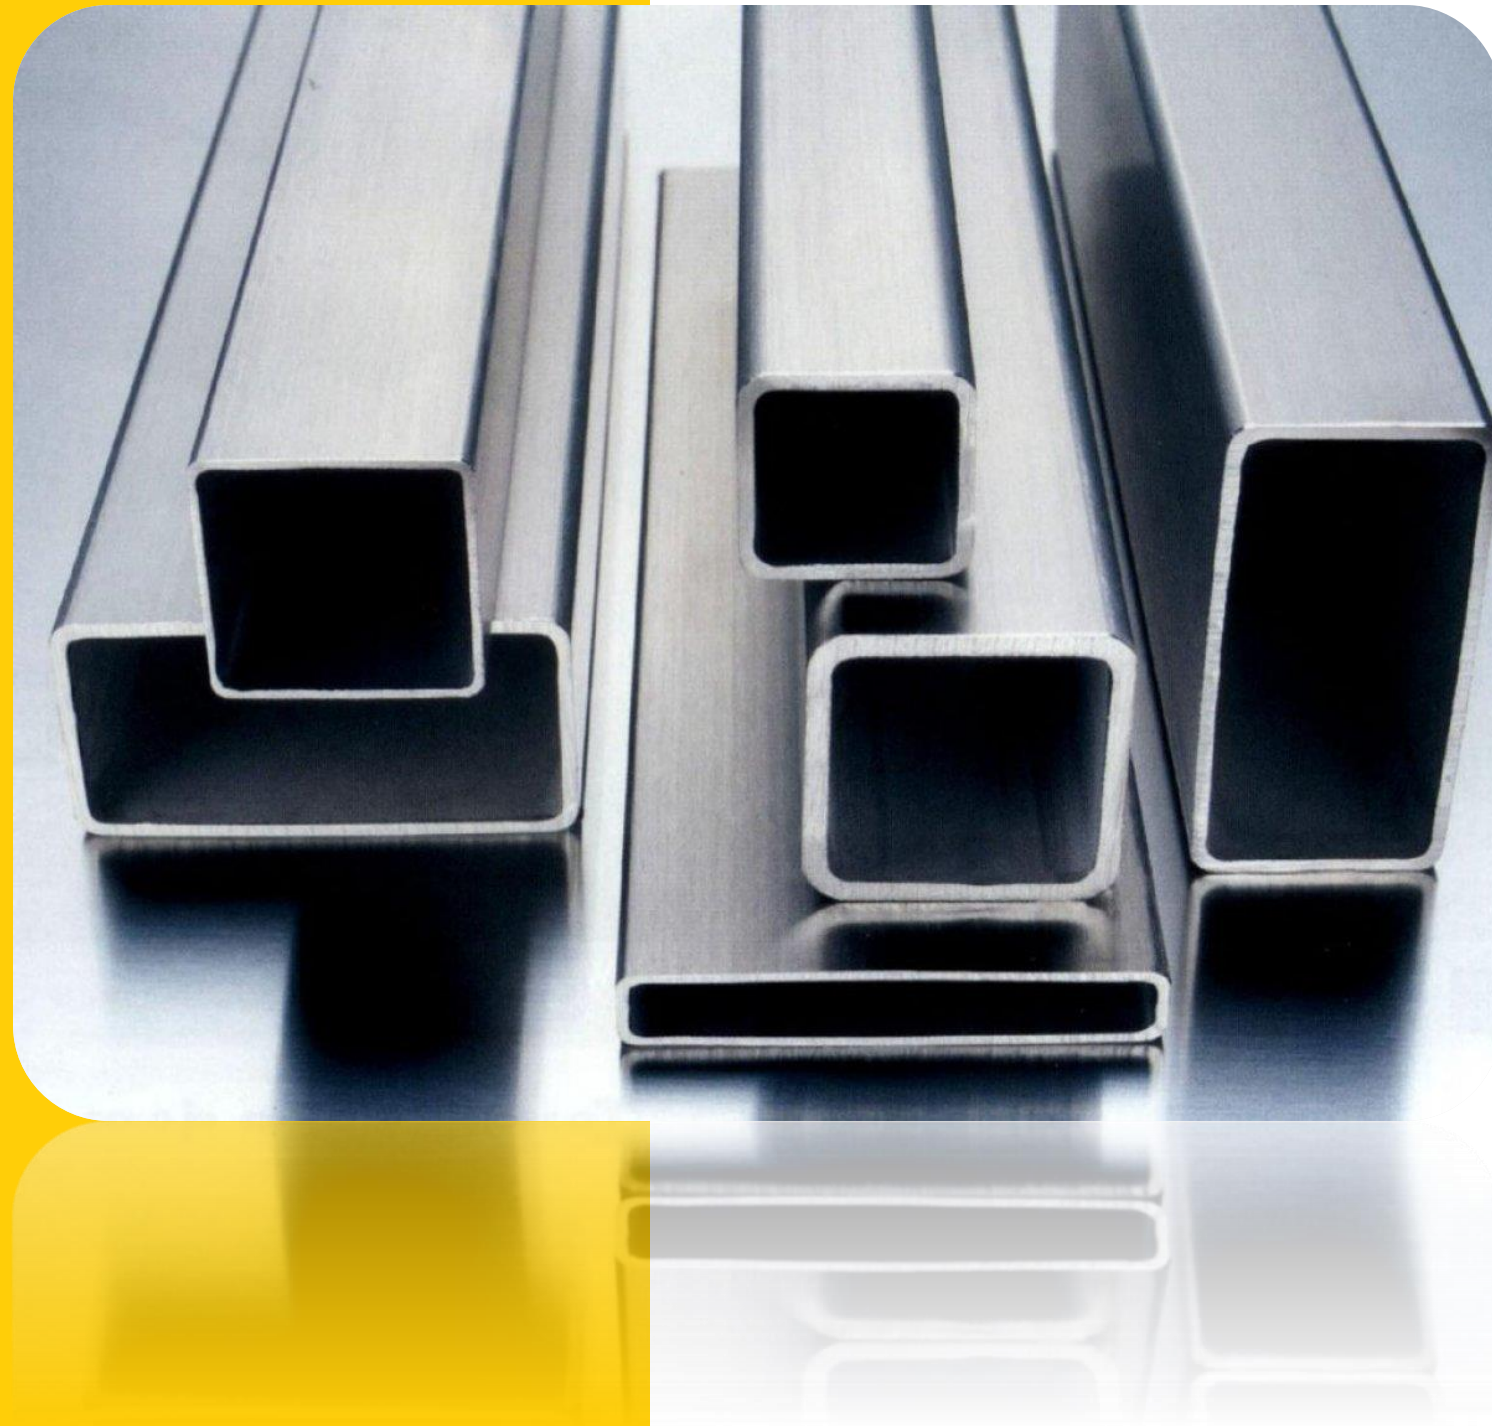

Technical Specifications

- ❖ Dimensions Range: 10x10mm - 120x120mm
- ❖ Zinc Coating Range: 40gr/m² - 500gr/m²
- ❖ Thickness Range: 0,50-3,00mm
- ❖ Length Range: 1000mm-6500mm
- ❖ Applications: Fencing, Construction, Agriculture.

Cut Wire



Technical Specifications

- ❖ Wire Diameter Range: 2,00mm - 12,00mm
- ❖ Zinc Coating Range: 40gr/m² - 500gr/m²
- ❖ Tensile Strength Range: 350N/mm² - 1970N/mm²
- ❖ Bundle Weight Range: 50kg up to 1.500kg
- ❖ Carbon Content: Low-Medium-High Carbon 1006-1082C
- ❖ Applications: Fencing, Gabion, Recycling Industry, Agriculture industry.

Grass Fence



Technical Specifications

- ❖ Wire Diameter: 1,60mm
- ❖ Zinc Coating: 40gr/m²
- ❖ Tensile Strength: 350N/mm² - 550N/mm²
- ❖ Mesh Size: 48x48mm
- ❖ Roll length: 10meters
- ❖ Applications: Fencing

BASE GLOBAL

Let's Connect With Us!

+90539 558 80 90



info@basegt.com



www.basegt.com



Address

Mahmutbey Mh. Tasocagi Yolu Cd. Agaoglu My Office no14 Bagcilar
34218 Istanbul Türkiye

www.basegt.com